

# INDAK LIGHTING

## ELV LED Troffer

2x2 and 2x4

### General Description

The ELV offers the look and feel of a fluorescent luminaire — subtle soft direct elements, interest and depth across the ceiling plane — with a contemporary look that blends with today's commercial spaces.

The frosted acrylic lens provides a diffused luminance, with the effective combination of excellent light transmission and haze.


### Features and Benefits

- High performance optical driver delivers main beam focus through the integrated acrylic lens
- Lumieo® acrylic diffuser manages the balance of efficiency and aesthetics
- WARRANTY—5 year limited warranty

### Applications

For recessed interior commercial applications such as offices, hospitals, schools etc. Suitable for use in standard 15/16" inverted T-Bar grid ceilings and dry wall.

ELV End Profile

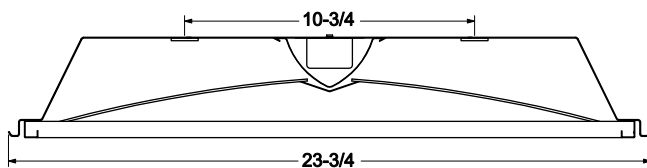

Catalog Number
Notes
Type



ELV LED Troffer Light source and luminaire specifications		
Specifications	2'x2'	2'x4'
Input Wattage	35.6	52
Delivered Lumens (lms)	3228	5125
Efficacy (LpW)	90.7	98.6
Color Rendering Index (CRI)	84.3	84.4
Color Temperature (CCT) k	3500, 4000	3500, 4000
Minimum Ambient Temp (°F)	-4	-4
Maximum Ambient Temp (°F)	158	158
Dimming	0-10v	0-10v
Rated Life (L70)	50000	50000
Warranty	5 years	5 years
Voltage (V)	120-277v	120-277v
Operating Frequency (Hz)	50/60	50/60
UL	Yes	Yes
FCC	Compliant	Compliant

Factory Part Number	Series	Size	Color Temperature	Lens	Dimming
*9Q504R	ELV22	2X2	4000K	Acrylic White	0-10V Standard
*9G504R	ELV22	2X2	3500K	Acrylic White	0-10V Standard
9R504R	ELV24	2X4	4000K	Acrylic White	0-10V Standard
9H504R	ELV24	2X4	3500K	Acrylic White	0-10V Standard

\*Not DLC Listed

ELV 3/17

