

INDAK LIGHTING

High Efficiency LED High Bay Fixture

- 2, 3, 4 or 6 Bar Configurations Available
- Dimming 0-10V
- Silver or Black
- 44 Inches Long



General Description

These high lumen fixtures should be mounted at least 12 feet above ground level. Weighing only 11 pounds, very light in weight and easy to install. They are designed to be suspended by Indak's "Cable Suspension Kit" an easy to use adjustable system. (sold separately). The High Bay is deal for use under high ceilings where bright light, long life, high efficiency and low maintenance is required.

Features and Benefits

- 4 Fixtures available 12,500 to 41,000 Lumens
- 142 to 151 Lumens Per Watt
- 0 - 10V dimming standard. Dimming range 100% to 10%
- Color Rendering Index 80 Min
- 5000K or 4000K Colors Available
- WARRANTY- 5 year limited warranty.

Catalog Number:
Notes:
Type:

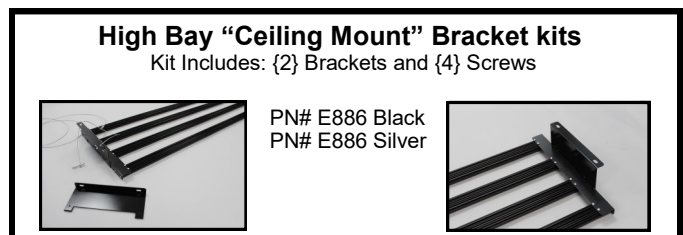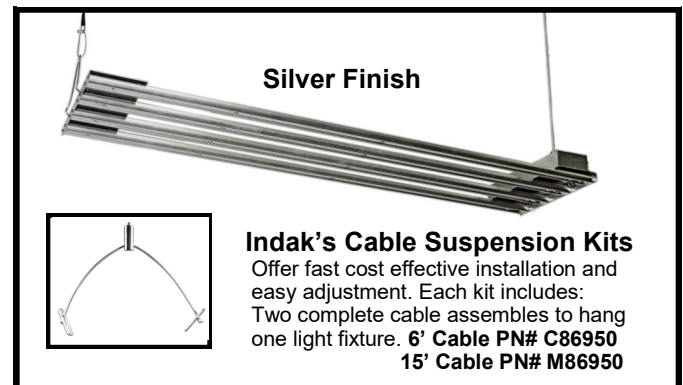

High Efficiency LED High Bay Fixture				
Light Source and Luminaire Specifications				
Specifications	2 Bar	3 Bar	4 Bar	6 Bar
Input Wattage	86	137	163	275
Delivered Lumens	12,500	19,600	24,800	41,000
Efficacy (lm/w)	146	142	151	149
Color Rendering Index (CRI)	80 Min	80 Min	80 Min	80 Min
Dimensions (inches)	44x12x3	44x12x3	44x12x3	44x12x3
Rated Life (L70) Hours	>54,000	>54,000	>54,000	>54,000
Warranty	5 years	5 years	5 years	5 years
Input Voltage (VAC)	100 - 277	100 - 277	100 - 277	100 - 277
FCC	Compliant	Compliant	Compliant	Compliant



Lumens	Bars	Length	Voltage	5,000K Color		4,000K Color	
				Silver	Black	Silver	Black
41,000	6	44"	MV-120-277 Volts	G521R	H521R		
24,800	4	44"	MV-120-277 Volts	A521R	9T520R	D521R	9W520R
19,600	3	44"	MV-120-277 Volts	B521R	9U520R	E521R	9Y520R
12,500	2	44"	MV-120-277 Volts	C521R	9V520R	F521R	9Z520R

High Bay 1/9/19